



OILPRO™ FULL SYNTHETIC MULTI-VEHICLE ATF


OILPRO™ FULL SYNTHETIC MV ATF is a synthetic universal automatic transmission fluid specifically designed for passenger car and light duty trucks to meet the performance requirements and suitability for use in the vast majority of today's modern Fuel Efficient transmissions (6 or more speeds). Its performance features can also be realized in the vast majority of older transmission applications (<6 speeds).

FEATURES & BENEFITS

- Multi-graded for optimum performance during cold starts & high temperature operations, including start/stop severe service.
- Lower inventory cost; one ATF can be used for a vast majority of Automatic Transmissions on the road today.
- Longer equipment life; specially formulated for extra wear control, corrosion protection formation of lacquers, sludge or other harmful deposits.
- Frictions modifiers control lock-up rates of clutch packs for proper transmission shifting characteristics and efficient power transfer.
- Designed for modern fuel efficient transmissions as well as older transmissions
- Designed for longer fluid life and faster oil flow in low temperature operation.
- Smooth Operations; JASO 1A Anti Shudder Durability (ASD) Performance
- Consistent shift quality throughout the life of the fluid.
- Controls seal deterioration to limit fluid leakage.

TYPICAL APPLICATIONS

BMW/MINI	LAND ROVER
CHRYSLER/DODGE/JEEP	MITSUBISHI
FORD/MAZDA	NISSAN/INFINITI/RENAULT
GM/GEO/OPEL/SATURN	PORSCHE
HONDA	SAAB
HYUNDAI	TOYOTA/LEXUS/SCION
IDEMITSU	SUZUKI
ISUZU	VOLVO
JAGUAR	VW/AUDI
KIA	

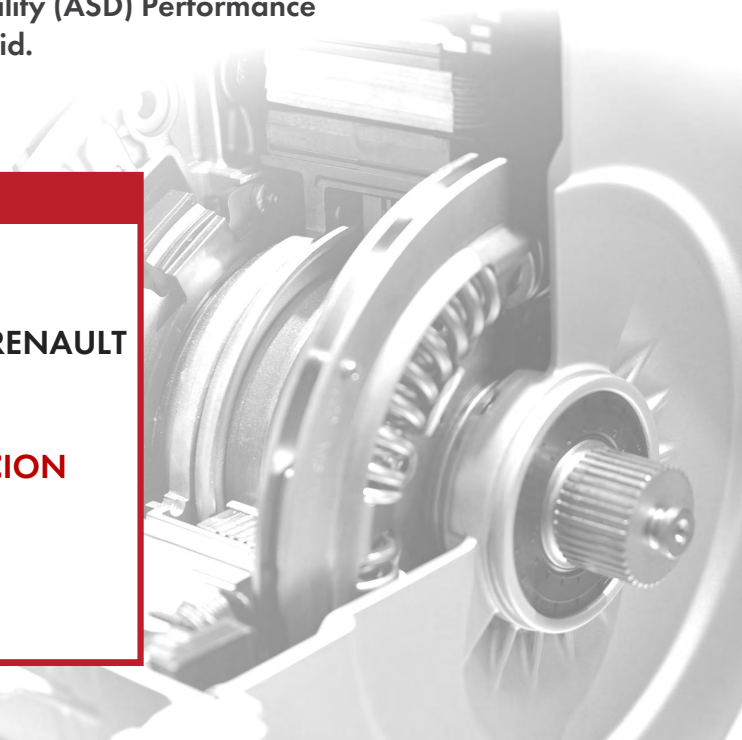



TYPICAL PROPERTIES

API GRAVITY	ASTM D4052	35.6
VISCOSITY	ASTM D445	
@40C, cSt		31.8
@100C, cSt		6.3
VISCOSITY INDEX	ASTM D2270	153
BROOKFIELD VISCOSITY, cPs	ASTM D2983	
@-40C		11,240 cP
POUR POINT	ASTM D97	<-42 C
COLOR	ASTM D5100	RED

Suitable for Use in the following applications:

AISIN WARNER AW-1 ALLISON C-4 AUDI G 052 025 (-A2) AUDI G 052 162 (-A1, -A2) AUDI G 052 990 (A2) AUDI G 055 025 AUDI G 055 005 (A2) BMW P/N 83 22 0 024 359, ETL-8072B BMW P/N 83 22 0 026 922, ETL-7045E BMW P/N 83 22 0 403 249, ETL-8072B BMW P/N 83 22 9 407 765, LA 2634 BMW P/N 83 22 9 407 807, LT 71141 BMW P/N 83 22 0 142 516, M-1375.4 CHRYSLER AS68RC CHRYSLER DIAMOND SP-III CHRYSLER TYPE 7176E [+3] CHRYSLER TYPE 9602 [+4] CHRYSLER P/N 05127382AA CHRYSLER P/N 68043742AA [DEX VI] ESSO LT 71141 FORD P/N XT- 2-DX [MERC] FORD P/N XT- 2-SM [SYN MERC] FORD P/N XT- 5-M [MERC V] FORD P/N XT- 5-SM [SYN MERC V] FORD P/N XT- 8-AW [PREMIUM] FORD P/N XT- 9-MM5 [FRN5] FORD P/N XT- 6-SP [MERC SP] FORD P/N XT-10-LV [LV] FUCHS ATF 3353 GM TASA GM DEX II GM DEX IID GM DEX IIE	HYUNDAI SP-IV IDEMITSU APOROIL ATF HP IDEMITSU K17 ISUZU 08200-9001 ISUZU GENUINE ATF JAGUAR ATF 3403-M115 JAGUAR ATF IDEMITSU K17 JAGUAR ATF LT 71141 JAGUAR P/N WSS-M2C922-A1 JAGUAR ATF M-1375.4 JASO 1A [M315-2004] KIA ATF M-1375.4 KIA RED-1 KIA SP-III KIA SP-IV LAND ROVER ATF M-1375.4 MAN 339 V1 MAZDA ATF TYPE T-IV MAZDA ATF-MIII MAZDA ATF-MV MERCEDES 236. 1 MERCEDES 236. 2 MERCEDES 236. 5 MERCEDES 236. 6 MERCEDES 236. 7 MERCEDES 236. 8 MERCEDES 236. 9 MERCEDES 236.10 MERCEDES 236.11 MERCEDES 236.12 MERCEDES 236.14 MERCEDES 236.15 MERCEDES 236.41	PORSCHE P/N 000 043 205 09 PORSCHE P/N 000 043 205 28 PORSCHE P/N 999 917 547 00 (A2) PORSCHE P/N 000 043 304 00 RENAULT MATIC D2 SAAB 3309 SAAB P/N 93 165 147 [AW-1] SATURN P/N 21005966 SATURN T-IV FLUID SHELL ATF 3403 M115 SHELL ATF 134 SHELL ATF 3353 SHELL LA-2634 SHELL M-1375.4 SUBARU ATF SUBARU ATF-HP SUBARU P/N K0140Y0700 SUZUKI ATF 3314 SUZUKI ATF 3317 TEXACO ETL-7045E TEXACO ETL-8072B TEXACO N402 TOYOTA TYPE T TOYOTA TYPE T-II TOYOTA TYPE T-III TOYOTA TYPE T-IV (JWS 3309) TOYOTA TYPE WS (HYBRID) TOYOTA TYPE WS (JWS 3324) VOITH 55.6335.XX (G607) VOITH NA S/B #013 (STANDARD DRAIN) VOITH NA S/B #118 (STANDARD DRAIN) VOLVO 97340 VOLVO 97341
--	--	--

2586 SOUTHPORT ROAD, SPARTANBURG, SC 29302
 1-800-922-3149





Suitable for Use in the following applications:

GM DEX IIF GM DEX III G GM DEX III H GM T-IV ATF GM AW 1 GM DEX VI GM WS ATF HONDA Z-1 HONDA DW-1 HYUNDAI DIAMOND SP-II HYUNDAI DIAMOND SP-III HYUNDAI M-1375.4 HYUNDAI NWS 9638	MINI P/N 83 22 0 402 413 MITSUBISHI DIAMOND QUEEN ATF-J2 MITSUBISHI DIAMOND SP MITSUBISHI DIAMOND SP-II MITSUBISHI DIAMOND SP-III NISSAN 402 NISSAN ATF NISSAN MATIC-D NISSAN MATIC-J NISSAN MATIC-K NISSAN MATIC-S PORSCHE P/N 000 043 204 41	VOLVO P/N 1161540-8 VW P/N G 052 025 A2 VW P/N G 052 162 (A1, A2) VW P/N G 052 990 A2 VW P/N G 055 025 VW P/N GUS 000 162 VW P/N G 055 005 VW P/N G 055 005 A2 ZF TE-ML 04D ZF TE-ML 09 ZF TE-ML 11A ZF TE-ML 11B
--	---	---

Published ATF Viscometrics Specifications

OEM	PUBLISHED SPECIFICATION	KV40 (cSt)	KV100 (cSt) MIN. MAX.		VI MIN.	Brookfield -40°C (cP)	KV100 after 20 hr KRL (cSt)
ALLISON	Allison C-4	--	--	--	--	20,000 max.	--
ALLISON	TES-295	--	7.0	--	--	8,700 max.	6.5 min.
CHRYSLER	MS 9602 (ATF+4®)	--	7.3	7.8	--	10,000 max.	6.5 min.
GM	DEXRON®-III(H) ⁽¹⁾	--	--	--	--	20,000 max.	--
GM	DEXRON®-VI	32 max.	--	6.4	145	15,000 max.	5.5 min. @40hr
FORD	MERCON® ⁽¹⁾	--	6.8	--	--	20,000 max.	--
FORD	WSS-M2C938-A ⁽²⁾	--	--	6.2	--	12,000 max.	5.5 min (5.0@40hr)
FORD	MERCON® V	--	6.8	8.1	--	13,000 max.	6.0 min.
FORD	MERCON® SP	--	5.5	6.0	--	9,500 max.	5.0 min.
JASO	M315-2002 1A	--	5.7	--	120	20,000 max.	5.4 min (5.7 sonic)
VOITH	H55.6335	--	--	8.2	--	20,000 max.	5.3 min
VOITH	H55.6336	--	--	8.2	--	20,000 max.	5.3 min.
ZF	TE-ML 14A	--	7.0	--	--	20,000 max.	5.3 min
ZF	TE-ML 14B	--	7.0	--	--	20,000 max.	5.5 min

(1) Obsolete specification

(2) MERCON® LV factory fill; service fill specification has not been published

2586 SOUTHPORT ROAD, SPARTANBURG, SC 29302
 1-800-922-3149

